

4-182.07SL Hinge Pr05 SNAP-LINE 180°

Door leaf tool-less installation, Surface mounted door, Door bending 25mm




Product Notes:

- Lift-off
- Frame leaf fastens to panel with screws
- Door leaf features tool-less installation
- RH and LH application
- The frame leaf can be fastened from outside and inside.
- Attaching door leaf with frame leaf:
 - 1) Position door at 30° opening.
 - 2) Place the door leaf into the opening in frame leaf
 - 3) Push door leaf into frame leaf
 - 4) Push pins to secure hinge
- Door can be removed at 30° door opening after pulling out the captive pins

Material:

- **Frame leaf, Door leaf and pin:** Zinc Die, Black
- **Wings:** Sintered Metal, Coated
- **Detent spring:** Spring Steel

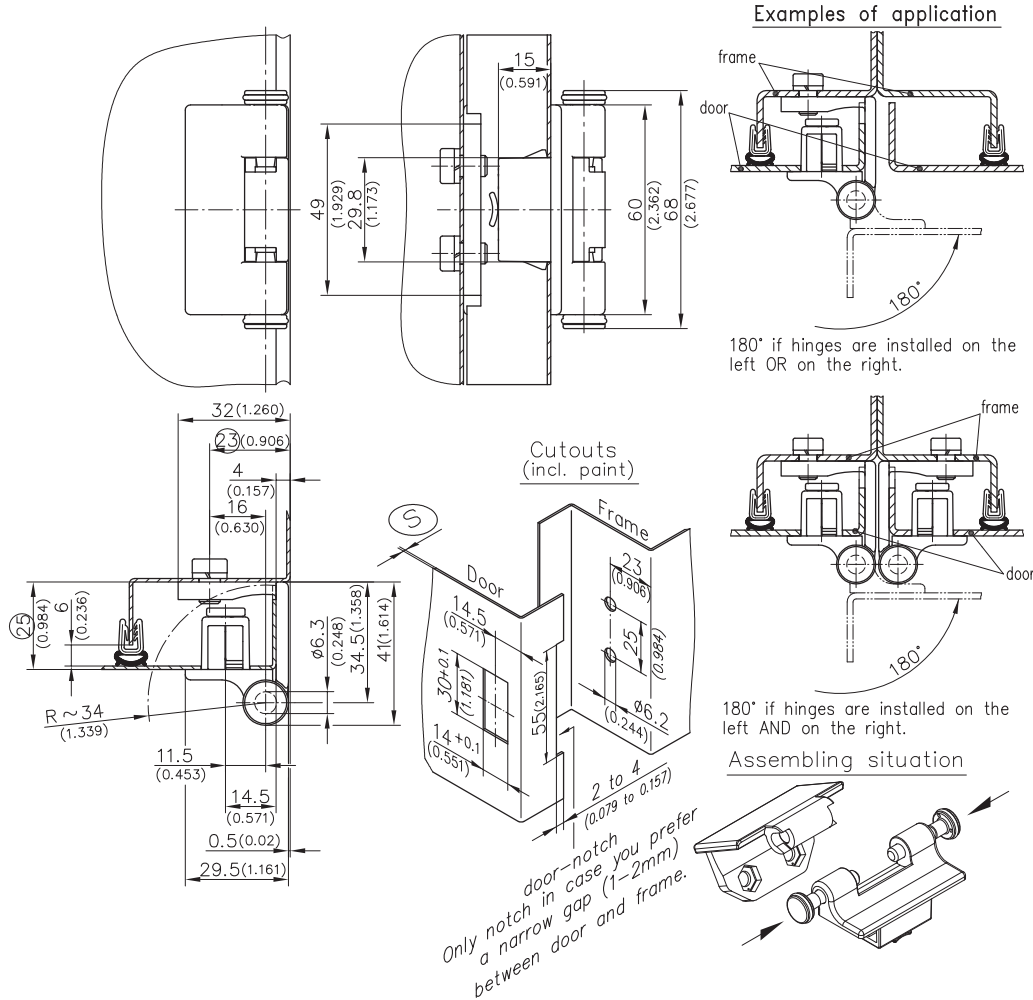

Hinge	Clamping Range [Ⓢ]	Part No.	See Page
	1.2 - 1.7	412-9006.00-00015	
	1.7 - 2.2	412-9006.00-00020	
	2.2 - 2.7	412-9006.00-00025	
	2.7 - 3.2	412-9006.00-00030	
	3.2 - 3.7	412-9006.00-00035	
Cover for cutout 30x14mm		292-0402.00-03014	10.14
Reinforcement plate for cutout 30x14 and 30x15		292-0701.15-01530	10.16
Tool for uninstallation		292-0306.80-02530	10.17
Tool for uninstallation		292-0301.15-00000	10.17