

# “SANDWICH” MOUNTING



(1) Natural frequency :  
5 to 13 Hz

## DESCRIPTION

The SANDWICH mounting comprises one or more layers of elastomer bonded to flat, parallel metallic plates. These mountings may be cylindrical or rectangular. They are designed to withstand very high compressive loads. The range of mechanical characteristics is governed by the hardness of the rubber and the number of intermediate metallic plates.

These mountings can support compression from 20 to 100 bars.

The metal plates usually receive a phosphate anti-corrosion treatment.

The elastomer is polychloroprene which provides a high resistance to atmospheric exposure.

## OPERATION

The design of the SANDWICH mounting gives the following basic characteristics :

- Very slim.
- Large surface area.
- Stackable mountings.
- The suspended equipment is free to move in all directions.
- High ratio of axial stiffness to radial stiffness.
- Very high axial loads.

(1) Natural frequencies with max/min loads, see : OPERATING CHARACTERISTICS.

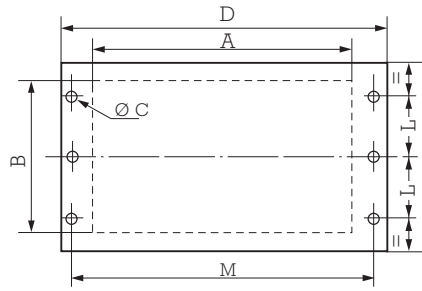


Fig. A

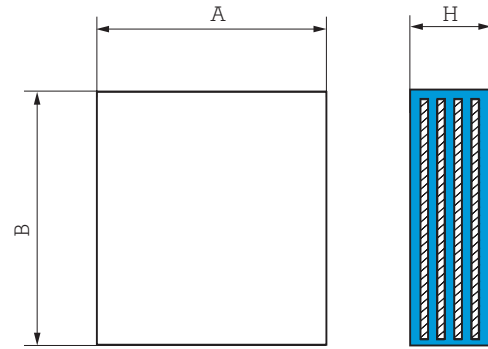
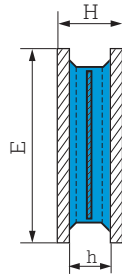


Fig. B

## MOUNTINGS WITH FIXING PLATES Fig. A

Reference without intermediate plate	Reference with intermediate plate	A mm	B mm	D mm	E mm	H mm	h mm	N° holes x Ø C (mm)	L mm	M mm	Weight kg
<b>539608</b>	<b>539607</b>	182	142	255	170	49	40	6 x 9	58	235	5
<b>539612</b>	<b>539933</b>	372	252	460	300	61	50	6 x 13	100	430	18
<b>539613</b>		702	252	805	300	61	50	6 x 17	95	765	35
	<b>539267</b>	160	110	230	110	58	44	4 x 15	35	202	5
<b>539821</b>		283	140	380	140	76	60	6 x 18	50	340	9.5

See current price list for availability of items.


Nominal static load	Deflection mm	Reference	Hard.
1000-4000	12	<b>539821</b>	50
1250-5000	7	<b>539608</b>	60
2500-10000	6	<b>539607</b>	45
6250-25000	3.5	<b>539267</b>	70
3750-15000	5	<b>539607</b>	60

Nominal static load	Deflection mm	Reference	Hard.
5000-20000	6	<b>539612</b>	45
7500-30000	7	<b>539612</b>	60
11250-45000	5	<b>539613</b>	60
15000-60000	4	<b>539933</b>	60

## MOUNTINGS WITHOUT FIXING PLATES Fig. B

Reference	A (=D) mm	B (=E) mm	H mm	Maximum static load daN
<b>539832</b>	200	165	38	95 000
<b>539823</b>	220	220	270	150 000
<b>539833</b>	240	200	38	145 000
<b>539992</b>	250	250	140	200 000
<b>539820</b>	400	300	78	380 000
<b>539835</b>	405	255	61	310 000
<b>539537</b>	500	500	66.5	870 000
<b>539890</b>	510	410	82	700 000
<b>539939</b>	600	500	125	1 000 000
<b>539520</b>	650	650	152	1 500 000
<b>539924</b>	702	252	52	450 000
<b>539903</b>	800	250	190	480 000
<b>539701</b>	750	750	300	2 000 000
<b>519821</b>	200	190	60	115 000
<b>519822</b>	260	230	60	185 000
<b>519823</b>	280	180	60	143 000


## CYLINDRICAL MOUNTINGS

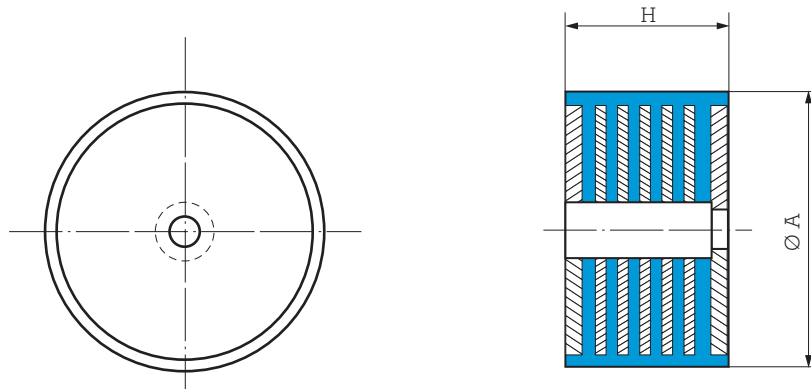

Reference	A mm	H mm	Nominal static load daN
539904	115	54	1 500
544051	150	110	12 000
539796	200	96.5	18 000
539983	200	90	5 000
539539	275	275	5 000
539938	320	19	100 000
539937	350	105	110 000
539900	400	117	150 000
544078	600	167	300 000
544079	600	285	433 000
544080	860	300	650 000

Various types of fixing are available. Consult us for information.

## DOMINANTLY RADIAL MOUNTINGS

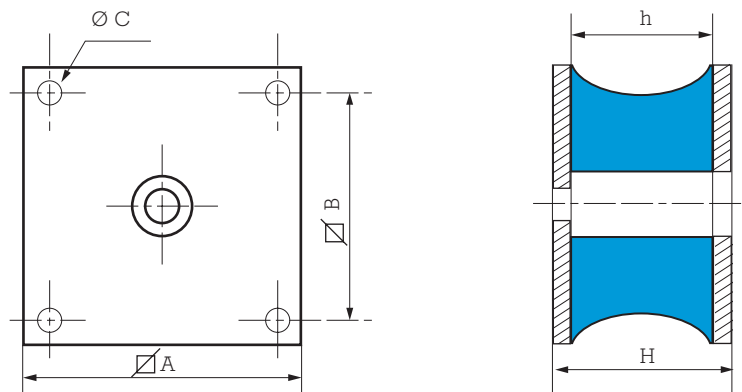

Reference	$\varnothing$ A mm	h mm	$\varnothing$ B mm	H mm	$\varnothing$ C mm	Shear		Compression daN
						mm	daN	
534646	150	62	120	70	12,5	20	200	1 500
534647	150	62	120	70	12,5	20	150	1 000
534455	232	74	190	86	16,5	25	500	2 000
534456	232	74	190	86	16,5	25	625	3 500
539898*	180	88	146	100	13	10	400	3 000
539917*	180	66	146	76	13	10	250	1 500
539940	300 x 480	318	430 x 219	350	18	70	4500	13 000
539806	360 x 200	100	330 x 170	120	18	30	1200	3 000
544051*	240 x 160	100	190 x 110	110	17	50	1800	10 000

\* Multilayer laminated part.

Various types of fixing are available. Consult us for information.

