

1-154.01 Quarter-Turn with L-Handle Pr20.1 L18

Hand operable with key or tool, IP65, Optional pre-assembly




Product Notes:

- Fasten to panel with nut
- RH and LH application
- Water and dust tight according to IP65, DIN EN 60529
- Components can be pre-assembled by DIRAK upon request
- Pre-assembled Quarter-Turn can be installed in cutout
- Padlock can be used only if cam is 90° to the handle
- Slotted and cylinder inserts can be interchanged in the same handle housing
- Choose from L-Handle with padlock and key cylinder or spring-loaded slotted insert

Material:

- **L-handle:** Zinc Die, Black
- **Housing:** Zinc Die, Zinc Plated
- **Slotted insert:** Zinc Die, Chrome Plated
- **Cylinder barrel:** Zinc Die, with Stainless dust cap
- **Cam:** Steel, Zinc Plated

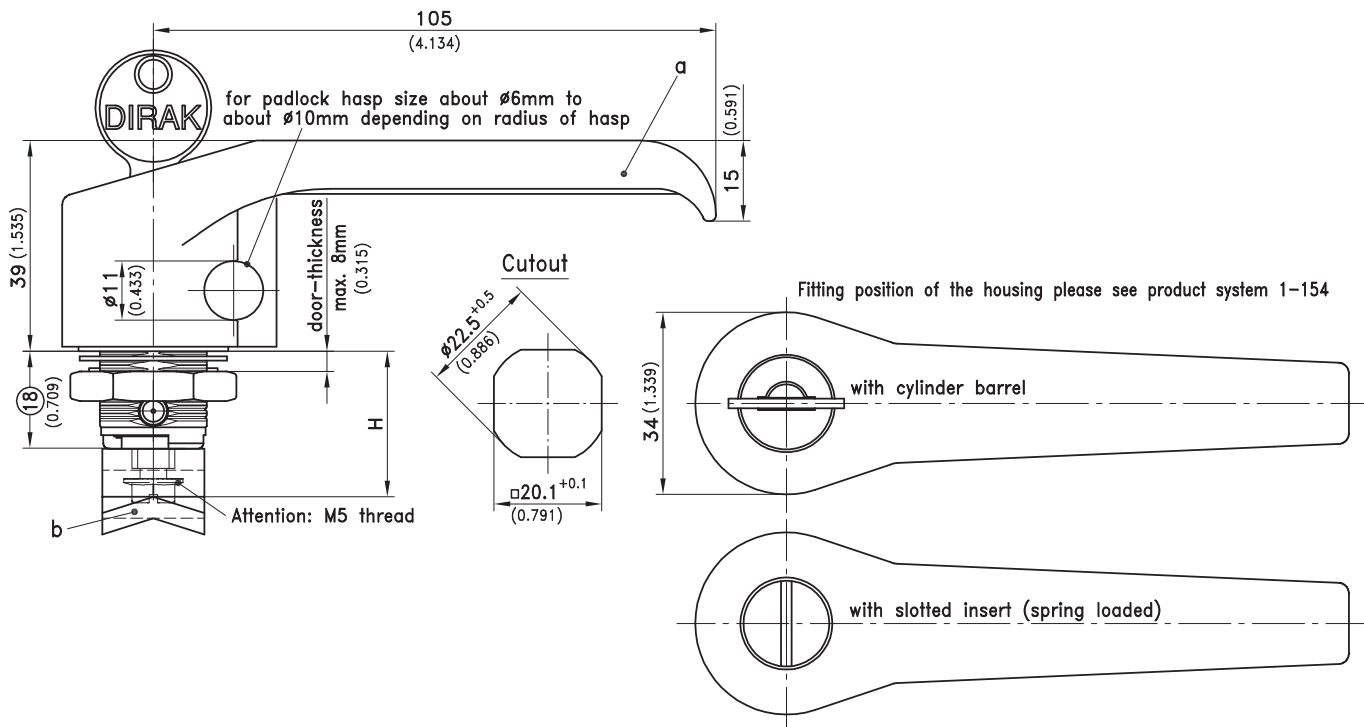

	E-coated Black	Textured Powder Black	See Page
a) Quarter-turn with L-handle with plain grounding nut			
Keyed alike DIRAK 1333*	200-9488	200-9488.TX	
Keyed different*	200-9490	200-9490.TX	
Slotted insert, Chrome Plated (spring loaded)	200-9489	200-9489.TX	
b) Cam or 3-point cam			01.101, 01.102
Optional:			
c) Assembling cam 90° to handle without O-ring	200-0019	200-0019	
Assembling cam for left door	200-0020	200-0020	

All lockable handles supplied with two keys.

* with stainless dust-shutter