

2-110 Swinghandle RS 130

Key or tool actuation, IP65, Cutout 130, Round rods





Product Notes:

- Uses round rods
- RH and LH application
- Insulated swinghandle
- Uses DIN 18252/18254 40 mm profile cylinders
- Water and dust tight according to IP65, DIN EN 60529
- Rod latch requires lock support - "c" in figure below
- Low profile design
- Opening rotation is 90°

Material:

- **Swinghandle:** PA, Black or Zinc Die, Black
- **Rod Latch:** Zinc Die, Steel, Zinc Plated
- **Lock support:** Zinc Die
- **Adapter:** Zinc Die
- **Round rods:** Steel, Zinc Plated
- **Rod Guide:** PA, Black

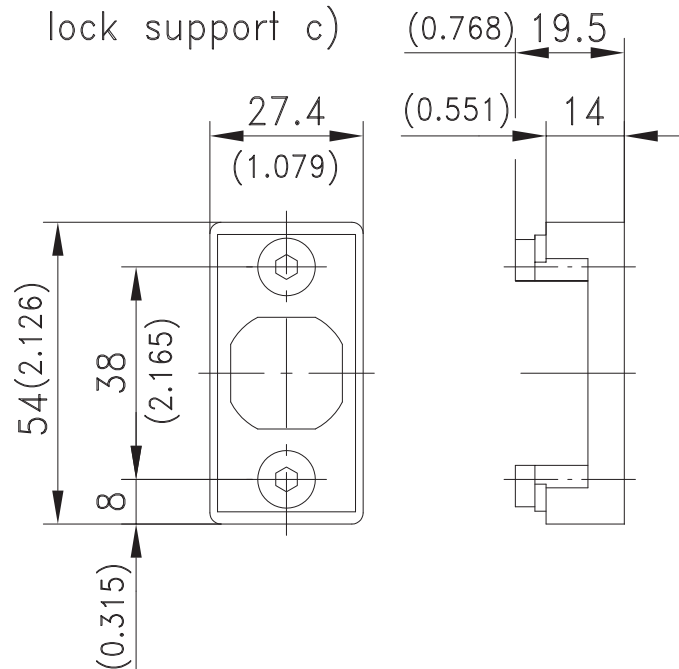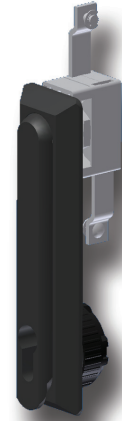

	Part No.	See Page
a) Swinghandle, PA (Black) for profile cylinder 40mm long	207-9023	
a1) as a), but with dustcover, sealable	207-9024	
a2) as a1), but 5mm raised for profile cylinder 45mm long	207-9030	
a3) as a2), but handle, Zinc Die (Black), dish, PA Black	207-9034	
Dish with cap □46	207-9346	
Versions a) to a3) with cam on request		
b) Rod latch FS PrA Stroke 24mm, 135°	208-9001	03.08
b1) Rod latch FS PrA Stroke 31.4mm, 180°	208-9008	03.08
c) Lock support	207-3501	
d) Adapter for round rods		03.49, 03.50
d1) Adapter for round rods		03.50
Optional:		
e) Round rods		03.46, 03.47, 03.38
f) Rod guide for bending A26	200-3602.03	03.52
g) Profile cylinder according DIN 18252		02.65

